



Condensing Units for A/C, high and medium temperature applications Tecumseh Compressors

Refrigerant: **R 22**

Model Number	Amb. Temp.	Refrigeration Capacity (W)									
		A/C		High		Medium			Low		
		Evaporating Temperature (°C)									
	(°C)	10	5	0	-5	-10	-15	-20	-25	-30	-35
CSM-9480M-A1/3	27	2900	2520	2170	1840	1550	1300	1090			
	32	2710	2360	2020	1710	1430	1200	980			
	38	2490	2160	1840	1550	1290	1070	890			
	43	2310	2000	1700	1420	1180	960	790			
CSM-9513M-A1/3	27	4200	3660	3110	2610	2140	1720	1350			
	32	3930	3410	2900	2420	1980	1580	1240			
	38	3610	3120	2640	2190	1780	1410	1100			
	43	3340	2880	2430	2010	1620	1270	980			
CSM-4519M-A1/3	27	5940	5260	4570	3920	3310	2760	2280			
	32	5560	4910	4260	3640	3070	2550	2090			
	38	5100	4490	3870	3300	2760	2280				
	43	4720	4140	3560	3010	2500	2050				
CSM-4524M-A1/3	27	7250	6260	5280	4380	3580	2900	2360			
	32	6780	5840	4920	4070	3320	2680	2170			
	38	6220	5340	4470	3690	2990	2400				
	43	5760	4920	4110	3370	2710	2160				
CSM-4531M-A1/3	27	9200	8050	6980	5940	4950	4030	3180			
	32	8500	7510	6490	5510	4580	3710	2590			
	38	7790	6860	5900	4990	4120	3320				
	43		6320	5420	4550	3730					
CSM-4540M-B3	27	12100	10680	9180	7680	6190	4720	3270			
	32	13310	9960	8540	7130	5740	4360	3020			
	38	10370	9100	7770	6460	5170	3910				
	43	9590	8400	7130	5600	4690	3510				
CSM-4546M-B3	27	14300	12210	10230	8440	6830	5420	4190			
	32	13370	11370	9480	7770	6240	4900	3740			
	38	12260	10370	8580	6970	5540	4290	3220			
	43	11350	9540	7840	6320	4970	3800	2800			
CSM-4553M-B3	27	15730	13590	11510	9570	7800	6210	4800			
	32	14710	12680	10690	8840	7160	5640	4300			
	38	13510	11590	9720	7980	6400	4980	3730			
	43		10690	8920	7280	5790	4450	3270			
CSM-4561M-B3	27	18190	15640	13190	10950	8940	7150	5590			
	32	17050	14610	12270	10130	8220	6520	5050			
	38	15690	13370	11170	9160	7360	5770	4400			
	43		12350	10250	8350	6650	5160	3880			
CSM-4568M-C3	27	20090	17400	14700	12180	9880	7890	6270			
	32	18780	16230	13680	11300	9130	7260	5730			
	38	17220	14840	12460	10240	8220	6480	5080			
	43		13670	11440	9350	7460	5830	4510			
CSM-4573M-C3	27	23020	19460	16270	13430	10950	8810	6990			
	32	21600	18210	15160	12470	10110	8080	6360			
	38	19860	16670	13800	11280	9070	7180				
	43	18390	15360	12650	10260	8190	6420				

Data based on Tecumseh specifications

Cubicool International reserves the right to alter specifications and capacities without prior notice

Condensing unit capacities provided at a return gas temperature of 32 °C and 0K subcooling (CECOMAF Conditions)



Condensing Units for A/C, high and medium temperature applications Tecumseh Compressors

Refrigerant: **R404A**

Model Number	Amb. Temp.	Refrigeration Capacity (W)									
		A/C		High		Medium		Low			
		Evaporating Temperature (°C)									
	(°C)	10	5	0	-5	-10	-15	-20	-25	-30	-35
CSM-9480Z-A1/3	27	3170	2760	2380	2030	1690	1390	1130	890		
	32	2930	2560	2190	1870	1550	1270	1020	800		
	38	2630	2290	1960	1670	1380	1130	900			
	43	2390	2080	1770	1510	1250	1020	800			
CSM-9513Z-A1/3	27	4540	3960	3410	2880	2380	1930	1520	1160		
	32	4160	3640	3120	2640	2170	1750	1360	1020		
	38	3710	3270	2800	2350	1930	1550	1190			
	43	3370	2940	2530	2100	1740	1380	1050			
CSM-4519Z-A1/3	27	6510	5780	5010	4320	3620	2960	2360			
	32	5930	5300	4630	3980	3330	2720	2150			
	38	5300	4710	4130	3540	2970	2430				
	43	4750	4240	3720	3190	2670					
CSM-4524Z-A1/3	27	7620	6600	5640	4720	3900	3110	2420			
	32	7010	6070	5170	4320	3530	2810	2160			
	38	6240	5390	4600	3820	3100	2440				
	43	5600	4830	4100	3400	2750	2120				
CSM-4531Z-A1/3	27	9160	8090	6970	5910	4920	4120	3180			
	32	8520	7450	6410	5420	4490	3630	2840			
	38	7600	6630	5690	4780	3940	3140				
	43	6850	5970	5090	4270	3500					
CSM-4540Z-B3	27	12040	10540	9040	7690	6430	5250	4230			
	32	11160	9690	8340	7050	5890	4790	3790			
	38	9890	8660	7460	6300	5230	4220				
	43	8950	7800	6700	5650	4670	3510				
CSM-4546Z-B3	27	14900	12760	10780	8950	7250	5750	4420			
	32	13590	11620	9770	8080	6510	5110	3870			
	38	12000	10220	8570	7020	5630	4360				
	43	10670	9100	7580	6200	4920	3770				
CSM-4553Z-B3	27	16080	13790	11740	9780	8010	6400	4940			
	32	14510	12540	10640	8860	7200	5720	4350			
	38	12770	11000	9300	7710	6230	4880				
	43	11390	9740	8220	6770	5450	4200				
CSM-4561Z-B3	27	17690	15320	13090	11080	9050	7280	5710			
	32	16080	13930	11870	9950	8180	6520	5070			
	38	14650	12310	10460	8760	7160	5660				
	43	12750	10990	9320	7750	6300	4910				
CSM-4568Z-C3	27	21180	18300	15610	13090	10820	8770	6880			
	32	19500	16840	14350	12030	9890	7970	6240			
	38	17520	15080	12800	10700	8770	6990				
	43	15950	13630	11540	9580	7820	6160				
CSM-4573Z-C3	27	23050	19830	16930	14220	11770	9540	7590			
	32	21140	18220	15530	13030	10760	8720	6870			
	38	18840	16250	13820	11580	9530	7660				
	43	16950	14570	12380	10320	8470	6770				

Data based on Tecumseh specifications

Cubicool International reserves the right to alter specifications and capacities without prior notice

Condensing unit capacities provided at a return gas temperature of 32°C and 0K subcooling (CECOMAF Conditions)



Condensing Units for medium and low temperature applications Tecumseh Compressors

Refrigerant: **R404A**


Model Number	Amb. Temp.	Refrigeration Capacity (W)									
		A/C		High		Medium				Low	
		Evaporating Temperature (°C)									
	(°C)	10	5	0	-5	-10	-15	-20	-25	-30	-35
CSL-2464Z-A1/3	27					3190	2670	2180	1760	1390	1000
	32					2940	2450	2000	1610	1260	890
	38					3640	2190	1780	1430	1110	790
	43					2830	1970	1600	1280	990	
CSL-2480Z-A1/3	27					4440	3750	3110	2530	1970	1470
	32					4080	3450	2850	2290	1780	1180
	38					3680	3080	2530	2010	1540	1080
	43					3340	2780	2260	1790	1340	
CSL-2511Z-A1/3	27					6160	5130	4210	3350	2590	1790
	32					5710	4730	3830	3030	2330	1560
	38					5100	4190	3390	2660	2010	1300
	43					4580	3770	3000	2340	1730	
CSL-2516Z-B3	27					8920	7480	6130	4870	3790	2890
	32					8160	6840	5570	4410	3430	2580
	38					7210	6050	4870	3840	2970	2180
	43					6490	5380	4320	3380	2560	1840
CSL-2522Z-B3	27					10910	9310	7610	6180	4970	3930
	32					10050	8520	6960	5610	4490	3460
	38					8900	7500	6110	4900	3840	2910
	43					7960	6670	5430	4290	3290	2450

Data based on Tecumseh specifications

Cubicool International reserves the right to alter specifications and capacities without prior notice

Condensing unit capacities provided at a return gas temperature of 32°C and 0K subcooling (CECOMAF Conditions)

CUBISTAR WALL-MOUNTED CONDENSING UNITS

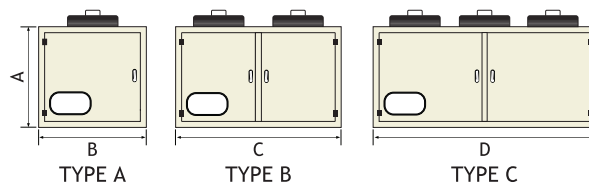

A	: 830mm
B	: 750mm
C	: 1150mm
D	: 1550mm

Depth: 480mm